




Hardiall[®] Mining Applications

Hard High Strength Spinodal Copper Nickel Tin Alloys

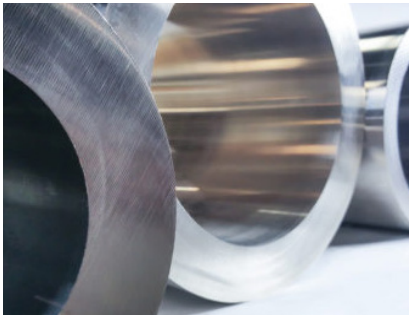

HARDIALL[®] KEY FEATURES & BENEFITS

- High strength & hardness
- Low friction
- Excellent lubricity
- Corrosion & erosion resistant
- Excellent wear resistance
- Excellent machinability
- Excellent galling resistance
- Pitting & spalling resistance
- No hydrogen embrittlement
- Non-magnetic
- High performance at both elevated and sub-zero temperatures -193°F up to 572°F
- Dimensional stability

Hardiall[®] is a wrought, spinodally hardened copper alloy CuNi15Sn8 (C72900) designed for high strength applications where toughness is required. It is non-magnetic and resists mechanical wear, galling, stress relaxation, corrosion and erosion.

It is easily machined into complex components and is environmentally friendly being both lead and beryllium free.

Hardiall[®] is used within the mining industry thanks to its outstanding physical and mechanical properties in many varied components. Lebronze alloys has developed a full range of Hardiall[®] products matching the stringent needs of the mining industry.

Lebronze alloys' manufacturing process for Hardiall[®] is fully integrated: *internal processes include casting, hot and cold working stage, heat treatment and non-destructive testing. Being fully integrated ensures reactivity and complete traceability.*

Hardiall[®] Properties and Benefits

HARDIALL[®] PHYSICAL PROPERTIES

Electrical Conductivity at 20°C (68°F)	7.5	% IACS
Thermal Conductivity at 20°C to 200°C (68°F to 392°F)	38 (22)	W/m/°C (Btu/ft/hr/°F)
Coefficient of Thermal Expansion at 20°C to 200°C (68°F to 392°F)	16.4 x10 ⁻⁶ (9.1 x 10 ⁻⁶)	Per °C (Per °F)
Density	8.95 (0.323)	g/cm ³ (lb/in ³)



Hardiall[®] Key Applications in Mining

Bushings and bearings

In mining equipment, bushings and bearings are subject to extreme conditions and need to be lubricated and replaced frequently, which results in downtime and maintenance man-hours.

Hardiall[®] is used in excavators, mining trucks and longwall shearers, where its performance characteristics - lubricity, wear and galling resistance - make it the ideal material for bushings and bearings. In such applications, Hardiall[®] outperforms steel and manganese bronze due to its superior durability and reliability, reducing downtime and maintenance cost.

Hardiall® Products Portfolio

Hardiall® is available in various tempers and grades offering different mechanical properties. The following table indicates Hardiall® products available for the mining industry.

MECHANICAL PROPERTIES OF HARDIALL® ALLOYS*						
LBA Designation	Minimal Yield Strength 0.2% Offset (MPa)	Minimal UTS (MPa)	Minimal Elongation 4D (%)	Typical Hardness (HRC)	Available Forms	Available Sizes

Wrought and spinodally hardened Hardiall® rods

Hardiall TX 90	620	760	15			
Hardiall TX 105	724	758	4			Contact us for more properties, customised products, size information and stock availabilities
	652	683	4			
Hardiall TX 110	760	910	10			
	760	875	6			

Solution annealed, cold finished and spinodally hardened Hardiall® rods

Hardiall TS 95	655	730	18			Contact us for more properties, customised products, size information and stock availabilities
	655	725	18			
Hardiall TS 120U	755	825	15			
	755	825	15			
Hardiall TS 130	895	965	10			
Hardiall TS 160U	1035	1105	3			
	1020	1100	3			

Wrought and spinodally hardened Hardiall® hollow bars/tubes (length limited to 1000mm) Wall thickness: 10 to 20% of Ø

Hardiall TX 105	724	758	4			Contact us for more properties, customised products, size information and stock availabilities
	652	683	4			
Hardiall TX 110	760	895	10			
	760	895	6			
	760	895	5			

* Measurements made in laboratory conditions. Non contractual. TS 120U & TS 160U refer to UTS, other tempers refer to YS. All products can be ultrasonically tested at LBA upon customer request.

Your trusted supply partner for premium quality metals and specialist plastics

Righton Blackburns Service Centres

Operating a reliable and efficient delivery service from our 11 Service Centres nationwide, we offer in-house processing facilities. In addition to next day delivery from locally-held stock, we also provide non-standard or customer specific material.

BEDFORD
Tel: +44 (0)1234 684 100
Email: bedford@rblimited.co.uk

BIRMINGHAM
Tel: +44 (0)1384 282 630
Email: birmingham@rblimited.co.uk

BRISTOL
Tel: +44 (0)117 948 2600
Email: bristol@rblimited.co.uk

GATESHEAD
Tel: +44 (0)191 338 7000
Email: gateshead@rblimited.co.uk

GLASGOW
Tel: +44 (0)141 646 3730
Email: glasgow@rblimited.co.uk

LEEDS
Tel: +44 (0)113 386 3280
Email: leeds@rblimited.co.uk

MANCHESTER
Tel: +44 (0)1942 758 800
Email: manchester@rblimited.co.uk

NORWICH
Tel: +44 (0)1603 243 900
Email: norwich@rblimited.co.uk

PLYMOUTH
Tel: +44 (0)1752 844 931
Email: plymouth@rblimited.co.uk

PORTSMOUTH
Tel: +44 (0)2392 623 070
Email: portsmouth@rblimited.co.uk

RB CENTRE
Tel: +44 (0)1384 276 400
Email: centre@rblimited.co.uk